

HP60 - FLOOR DRYING PACKAGE



ORDER #
HP60FDP

SPECS

Total System Airflow	108 CFM (cubic feet per minute)
Static Pressure maximum)	60" of water lift
Weight (blower unit only)	50 lbs
Power Draw (115V)	5.6A - 11A (depending on load)
Drying Modes	Negatively or positively
Dimensions	18" x 13" x 16.2" (with pipes)
Warranty	7 YR-Housing, 3 YR-Blower, 1 YR-Parts Limited


The HP60 Package is designed specifically for floor and limited ceiling drying. The set-up is extremely quick, easy and efficient for your typical floor drying needs. Increase your capabilities to dry ceilings & walls by purchasing AH-CWK.

COMES WITH:	QTY	PART #
HP60 Unit	1	
Main AIR IN - Quick Connects installed at factory	1	PTFC
Main AIR OUT - Quick Connects installed at factory	1	PTMA
AIR OUT Main Hose - 6' w/ factory-set PRV	1	AOMH
AIR IN Main Hose - 6' Inline Filter, factory-set PRV & Main OCT	1	AIMH
Carry Bag	1	CB3
Rolling Duffle Bag	1	CB2
Safety Yellow Blank Hose 1½" x50'	2	PLO3
Quick Connect - Panel T's (Hosecuffs attached)	8	VAC-T
Quick Connect - 1½" Hosecuff	14	HC3
Quick Connect Inline Manifold	6	IM01
End Cap Plugs	7	QCEPO1
Variety Panel Package: (6) Large Multi Port Panels, (1) 8 Point, (1) Clear, & (1) U Panel Kit (which includes (1) U Panel & (3) Small Panels w/ 3/8" Port	1	VACITPA-VP
Safety Yellow Tubing (3/8" x 200')	1	RHO5A
Soft Tubing Stoppers (bag of 40)	1	RP2
Silencer	1	SILENCER
CD and Manual	1	

HP60 - FLOOR DRYING EXAMPLES



Multiport Panel

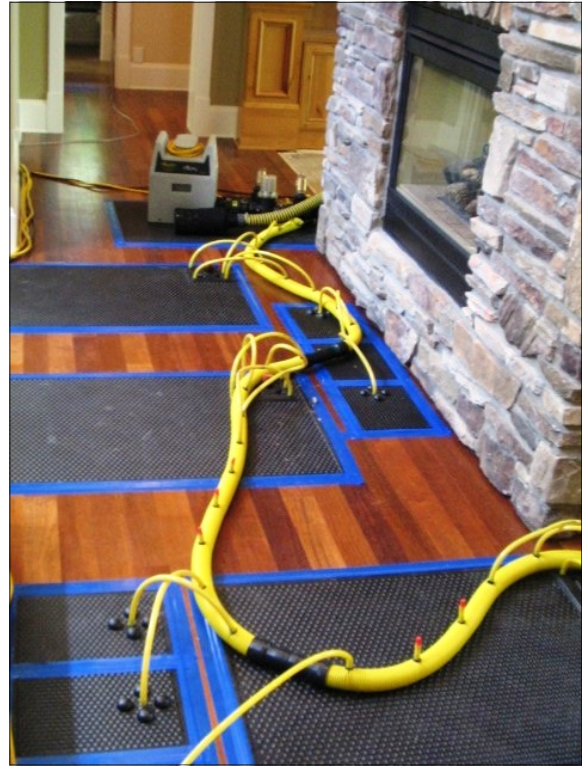

8 Point Panels and Multi-Port Panels



Floor drying set-up shows HP60 and Multi Port Panels

* Interceptor (sold separately)