

HP60 - FLOOR DRYING PACKAGE



ORDER #
HP60FDP

SPECS

DATA	U.S./CAN DETAILED INFO
Model No.	HP60
Weight of HP60	58 lbs.
Total System Airflow	103 CFM (cubic feet per minute)
Static Pressure (Maximum)	60" (water lift) and still has 55 CFM
Housing Material	MDPE - med. density polyethylene
Motor Type	Industrial Regenerative Blower
Power Draw - 115v	15A circuit needed : 5.6 - 6.5 A (no restrictions) 11 - 12 A (avg. application.)
Drying Modes	Either Negatively or Positively


Designed for drying floors or ceilings using the HP system in negative mode with our Vac-It Panels (patent pending). The set-up is extremely quick, easy and efficient for your typical floor drying needs. To add versatility purchase Active Hoses, Manifolds or WCB accessories.

COMES WITH:	QTY	PART #
HP60 Unit	1	
Main AIR IN - Quick Connects installed at factory	1	PTFC
Main AIR OUT - Quick Connects installed at factory	1	PTMA
AIR OUT Main Hose - 6' w/ factory-set PRV	1	AOMH
AIR IN Main Hose - 6' Inline Filter, factory-set PRV & Main QCT	1	AIMH
Carry Bag	1	CB3
Rolling Duffle Bag	1	CB2
Safety Yellow Blank Hose 1½" x50'	2	PLO3
Quick Connect - Panel T's (Hosecuffs attached)	8	VAC-T
Quick Connect - 1½" Hosecuff	14	HC3
Quick Connect Inline Manifold	6	IM01
End Cap Plugs	8	QCEPO1
Variety Panel Package: (6) Large Multi Port Panels, (1) 8 Point, (1) Clear, & (1) U Panel Kit (which includes (1) U Panel & (3) Small Panels w/ 3/8" Port	1	VACITPA-VP
Safety Yellow Tubing (3/8" x 200')	1	RHO5A
Soft Tubing Stoppers (bag of 40)	1	RP2
Silencer	1	SILENCER
Manual	1	

FLOOR DRYING EXAMPLES



Multiport Panel

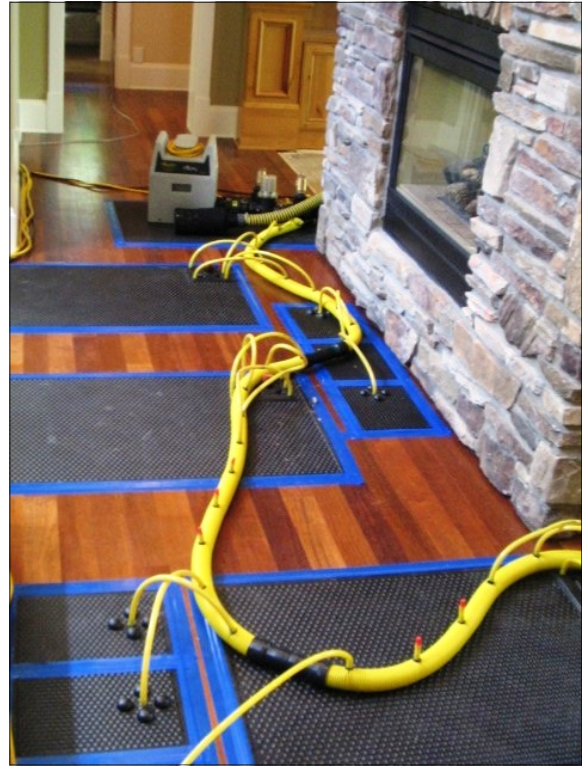

8 Point Panels and Multi-Port Panels



Floor drying set-up shows HP60 and Multi Port Panels

* Interceptor (sold separately)